






















VITA CLASSIC ELITE

DIGITAL PRINT CORK FLOATING FLOOR – WEARPLUS[®] FINISH

TECHNICAL SPECIFICATION

GENERAL DEFINITION AND PRODUCT COMPOSITION			
Definition			Digital printed loose laying Cork Floor Panels, with 10,5mm thickness, to be used as an interior floor covering, in accordance with EN 14085.
Dimensions			1164 x 194 x 10.5 mm
Finish			WEARPLUS [®] High performance PUR HotCoating [®] finished with 2 component waterborne lacquer, with very low VOC content and extremely high wear, impact and chemical resistance.
Product structure			<p>Top layer: 2.5mm thickness high-density agglomerated cork, direct printed with a high definition digital graphic.</p> <p>Core layer: HDFCORE High-density fibreboard 6.5 mm, with very low formaldehyde content (E1), CARB ATCM Phase II and TSCA Title VI compliant, and high moisture resistance properties.</p> <p>Backing layer: 1.5 mm insulating soft agglomerated cork sheet with integrated MICROBAN[®] antimicrobial protection.</p> <p>Embossing: AWS.</p> <p>Edges: 4 sides bevelled.</p>
Installation			Glue-less Uniclic [®] locking system, installed floating according to installation instructions
TECHNICAL DATA			
	Classification	EN ISO 10874	Domestic 23 Residential areas with high traffic
			Commercial 32 Public areas with medium traffic
	Length and width	EN ISO 24342	1164 x 194 mm ± 0.10%
	Overall thickness	EN ISO 24346	10.5 mm ± 0.20 mm
	Thickness of cork surface layer	EN ISO 24340	2.5 mm -0/+0.20 mm
	Density of cork surface layer	ISO 3850	> 550 Kg/m ³
	Squareness Straightness	EN ISO 24342	< 0.3 mm < 0.2 mm

VITA CLASSIC ELITE
DIGITAL PRINT CORK FLOATING FLOOR – WEARPLUS[®] FINISH
TECHNICAL SPECIFICATION

TECHNICAL DATA			
	Flatness of the panel Length - Concave / Convex Width - Concave / Convex	EN 14085	≤ 0.10 % / ≤ 0.5 % ≤ 0.05 % / ≤ 0.1 %
	Openings between panels Average / Individual values	EN 14085	≤ 0.10 mm / ≤ 0.15 mm
	Height difference between panels Average / Individual values	EN 14085	≤ 0.15 mm / ≤ 0.20 mm
	Dimensional variation caused by changes in atmospheric humidity	EN 14085	≤ 0.4 %
	Residual indentation	EN ISO 24343-1	≤ 0.25 mm
	Locking strength Long / Short	EN ISO 24334	> 3 kN / m / > 4 kN / m
	Castor chair	ISO 4918	No disturbance to the surface other than slight change in appearance and no delaminating shall occur
	Simulated movement of a furniture leg	EN ISO 16581	No damage shall be visible when tested with foot type 2
	Mass per unit area	EN ISO 23997	7900 g/m ²
	Abrasion resistance	EN 14354	> 7000 rev
	Impact resistance (small ball)	EN 438-2	> 40 N
	Scratch resistance	EN 438-2	Rating 2 (2.0 N)
	Impact noise reduction	EN ISO 10140-3	ΔL _w = 18 dB
	Thermal resistance	EN 12667	0.10 m ² .KW
	Light fastness	EN ISO 105-B02	6 (blue scale)
	Slip resistance	EN 13893	Technical class DS
	Formaldehyde emission	ENV 717-2	Formaldehyde Class E1
	Reaction to fire	EN 13501-1	Class C _{fl} -s1


VITA CLASSIC ELITE

DIGITAL PRINT CORK FLOATING FLOOR – WEARPLUS® FINISH

TECHNICAL SPECIFICATION

GENERAL DATA

Packaging	<p>Floating floor panels are dispatched in cardboard trays wrapped in shrinking foil, providing suitable protection for normal transport and storage conditions. Packages are identified by a label and/or inkjet printing and palletized. Each pallet is over strapped and wrapped with stretch film.</p> <p>7 planks/pack; 1.58 m² per pack; 56 packs per pallet; 88.5 m² per pallet.</p>
Underfloor heating	<p>Suitable for hot-water underfloor heating and electrical underfloor heating when it is built into the floor screed or the concrete layer. The recommended maximum surface temperature is 28°C. The specific floating floors installation instructions for underfloor heating must be observed.</p>
Limited warranty	<p>We certify that the product is free from manufacturing and structural defects and will remain free of these defects.</p> <p>We guarantee that the surface finish will not wear through within 20 years (Residential) or 10 years (Commercial), under normal residential or commercial use and with proper maintenance.</p> <p>For warranty conditions, see www.granorte.com.</p>
Environment	<p>VITA CLASSIC ELITE cork floating floors are made from more than 80% natural raw materials (cork and wood), 30% of which are rapidly renewable, along with a 35% recycled content.</p> <p>Contains no PVC and no softeners or other substances hazardous to health or environment.</p>

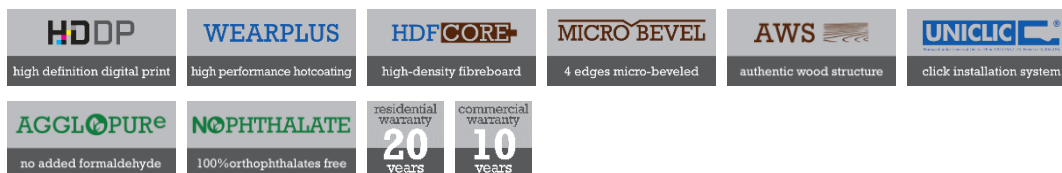

FSC® certified products are available upon request

GRANORTE reserves the right to make changes to material and structure to improve the quality or technical performance.